


Ključ nasadni, dvanaesterokutni, dugi, prihvat 1/2"

190/1L12p



Profili

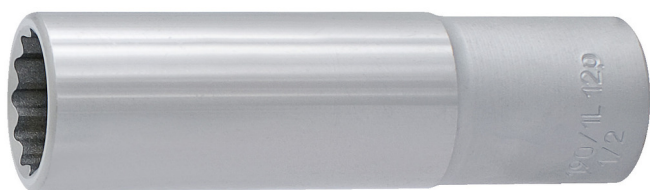


Zatvori pretraživanje

ISO 2725-1

Atributi proizvoda

- materijal: Premium Flex krom-vanadij
- kovan, u cijelosti ojačan i zakaljen
- kromirani (ISO 1456:2009)
- poliran
- izrađeni prema standardu ISO 2725-1 (samo metričke dimenzije)

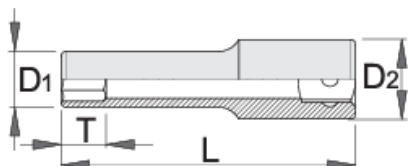




D1

D2

L

T↑



		D1	D2	L	T↑		
610762	10	15	22	77	12	85	
610763	11	16.3	22	77	12	110	
610764	12	17.6	22	77	12	100	
610765	13	18.8	22	77	12	107	
610766	14	20.4	22	77	15	112	
610767	15	21.6	20.7	77	15	107	
610768	16	22.9	21.5	77	15	121	
610769	17	24	22	77	15	130	
610770	18	25.4	23	77	18	150	
610771	19	26	21	77	18	140	
610772	20	27.9	24	77	18	176	
610773	21	28	25	77	18	166	
610774	22	30	26	77	21	197	
610775	23	31.6	27	77	21	226	
610776	24	32	28	77	24	223	
610777	27	36	30	77	27	277	
610778	30	40	34	77	30	317	
610779	32	42	36	77	33	335	
610780	3/8"	15	22	77	12	85	1

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Frequently asked questions

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.